

Neuson Fourwheel drive dumper

Technical Data

1001



Capacity

Max. safe load	1000 kg
Unladen weight	1165 kg
Skip - struck	415 l
- heaped	525 l
- water level	275 l



Engine

Make	Yanmar
Type	3 TNE 74
	3-cyl, watercooled
Output (Iso 3046/1)	12,1 (16,5) kw (hp)
Revolution	2200 min-1
Displacement	1006 ccm
Max. Torque	63 Nm
Emission	acc. 97/68/EG



Drive characteristics

Speed	0 - 14 km/h
Steering angle	+/- 33 °
Oscillation	+/- 15 °
Turning radius outside	3200 mm
Gradeability	45 %



Transmission

Final Drive	hydr. automotive, TWIN-LOCK permanent 4 wheel drive, electro-hydraulic direct.control
Steering	hydrostatic center-pivot steering (load sensing)
Tyres	10.00/75x15 [6.00-16] 8 Ply [6 Ply] Traction profile
Working brake	Hydrostatic
Parking brake	Wet disc in rear motors



Hydraulic System

Drive pump	axial piston pump
- flowrate	99 l/min
- oper. press.	360 bar
Working pump	gear pump
- flowrate	18 l/min
- oper. press.	170 bar



Tank capacity

Diesel	15 l
Hydraulic	20 l



Electric

Voltage	12 V
Battery	50 Ah
Alternator	20 A
Starter	1,2 kw




Noise Emission

Noise Level LWA (acc. 2000/14/EC)	102 dB(A)
Noise Level LPA (acc. 2000/14/EC)	85 dB(A)



Dimension

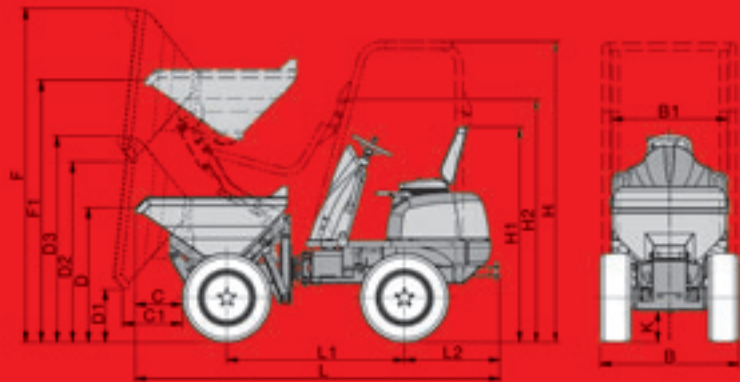

	B	B1	C	C1	D	D1	D2	D3	
mm	1180 [990]	990	385	510	1160	465	1560 [1140]	1770	
	F	F1	H	H1	H2	K	L	L1	L2
mm	2860 [2440]	2250 [1830]	2580	1850	2080	270	3080	1500	810

* [] narrow version



Features

- Compact dimensions allows operation in areas with restricted access
- Excellent rough terrain performance from hydrost. permanent 4-wheel drive
- Heavy duty construction; skip with 5-6 mm steel plate, reinforced with box sections
- Simple and safe operation; drive direction switch on the steering column.
- Acceleration by foot pedal and braking from hydrost. retardation
- Wide, heavy duty center console protects driver legs,
- Simple and clear dashboard including fuel gauge, hourmeter, warning lights for-parking brake, oil filter,oil pressure,engine temperature
- Folding ROPS as standard
- Easy access for service maintenance
- Towing bracket as standard



Optional equipment

- Flashing Beacon
- Reversing Alarm
- Spare Wheel
- Biodegradeable hydraulic oil
- Awning for control stand and seat

Neuson Baumaschinen GmbH
 Haidfeldstraße 37
 A-4060 Linz-Leonding
 Tel. +43 (0) 732/ 90 590-0
 Fax +43 (0) 732/ 90 590-200
 e-mail: verkauf@neuson.com
 www.neusonkramer.com

Lifton Dumpers Ltd
 Crown Business Park,
 Duketown, Tredegar,
 Gwent. NP22 4EF
 United Kingdom

Tel +44 1495 723083
 Fax +44 1495 713941
 e-mail: sales@liftondumpers.com
 www.neusonkramer.com

Kramer-Werke GmbH
 Postfach 10 15 63
 D-88645 Überlingen/Bodensee
 Tel. +49 (0) 7551/ 802-440
 Fax +49 (0) 7551/802-260

e-mail: info@kramer.de
 www.neusonkramer.com



We reserve the right to change the above specification w/o prior notice.
 044076 - November 2004 - Art.-Nr.: 1000142249



neuson®